

# QUAD

## **CABLE CLEAT**

#### **MULTIPLE CABLE TYPE**

#### Features and Benefits


- Provides securing, support and retention of cables in cable ladder, tray or strut systems.
- Designed to hold cables together in a quad arrangement and to provide resistance to electromechanical forces during short circuit conditions.
- Suitable for use with LV and HV cables.
- · Manufactured from corrosion resistant non-magnetic 316L Stainless Steel.
- Complete with LSOH polymeric liners to protect cable sheaths during installation and movement due to electromechanical forces during short circuits.
- · Accessible tightening bolt allows for easy tightening with a single tool.
- Wide range 16mm to 70mm.





Construction	
Frame:	Corrosion resistant, non-magnetic 316L Stainless Steel
Cable resting base:	LSOH Halogen Free Plastic - Polymeric composite
Liner:	LSOH Halogen Free Plastic - Polymeric composite
Locking hardware:	M8 or M10 Bolt (316 Stainless Steel) and Nylon Locking Nut

Technical Specification	S
Type:	Quad
Standard:	IEC 61914:2021
Lateral load test:	Average 25kg
Axial load test:	Pass according to IEC 61914:2021
Impact resistance:	Very Heavy
Temperature range:	-50°C to 105°C
Needle flame test:	650°C for 30 sec
UV resistance test:	1,000 hrs

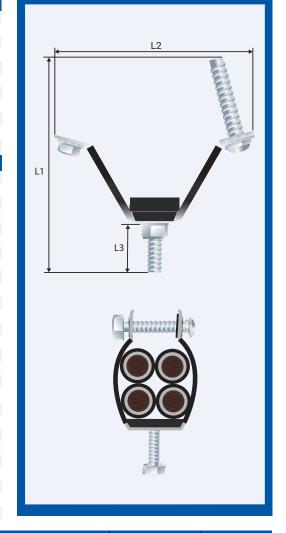

#### <u>IEC</u>

Product Code	Cable Range		Dimensions (mm)			Bottom	Torque
	Min. Dia. mm	Max. Dia. mm	L1	L2	L3	Mounting Bolt	Value Nm
CC-Q1622	16.0	22.0	64.0	146.0	30.0	M8	10-15
CC-Q2325	23.0	25.0	71.0	162.0	35.0	M10	14-20
CC-Q2628	26.0	28.0	78.0	174.0	35.0	M10	14-20
CC-Q2931	29.0	31.0	87.0	189.0	35.0	M10	14-20
CC-Q3235	32.0	35.0	99.0	209.0	35.0	M10	14-20
CC-Q3641	36.0	41.0	112.0	232.0	35.0	M10	14-20
CC-Q4247	42.0	47.0	131.0	264.0	35.0	M10	14-20
CC-Q4853	48.0	53.0	148.0	293.0	35.0	M10	14-20
CC-Q5459	54.0	59.0	160.0	317.0	35.0	M10	14-20
CC-Q6065	60.0	65.0	176.0	345.0	35.0	M10	14-20
CC-06670	66.0	70.0	102.0	374.0	35.0	M10	1/1-20


All dimensions are in mm.

## FITTING INSTRUCTIONS


### **Metric Illustration**

## **QUAD CABLE CLEAT**



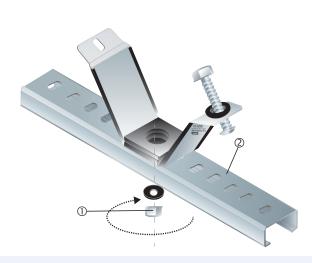

1. Unscrew the bottom mounting nut 1. Place the Cable Cleat on the mount plate 2.

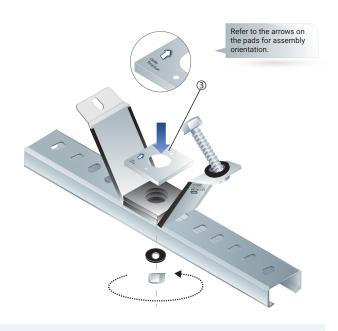


2. Place additional pads  $\ensuremath{\mathfrak{G}}$  according to cable outer diameter; refer to the arrows on the pads  $\ensuremath{\mathfrak{G}}$  for assembly orientation.




3. Unscrew the top nut  $\ensuremath{\textcircled{4}}$  and prepare the cables.



4. Place cables ⑤ into cleat.

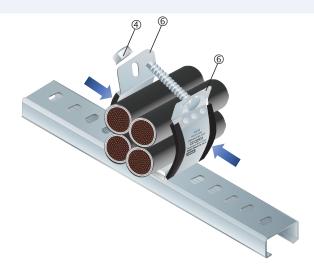

5. Close the cleat arm ⑥. Pre-assemble the top nut ④.

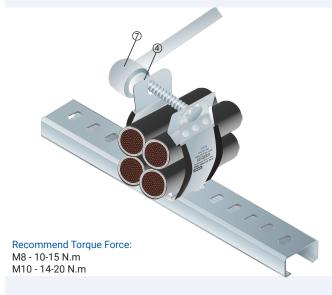

6. Use a torque wrench ⑦ to tighten the top nut ④.