



# SINGLE CABLE CLEAT

## SINGLE CABLE TYPE

### Features and Benefits

- Used to restrain single cables (single core or multi-core) onto cable ladder, tray or strut systems.
- Open hinge system allows easy placement of the cable into the cleat prior to tightening.
- Manufactured from corrosion resistant, non-magnetic 316 stainless steel.
- Complete with LSOH polymeric liners to protect the cable sheath.
- Accessible clamping bolt allows easy tightening with a single tool.

### Construction


|                     |  |
|---------------------|--|
| Frame:              | Corrosion resistant, non-magnetic 316 stainless steel    |
| Cable resting base: | LSF Polymeric composite                                  |
| Liner:              | LSF Polymeric composite                                  |
| Locking hardware:   | 316 stainless steel M8 or M10 bolt and nylon locking nut |

### Technical Specifications

|                        |                                  |
|------------------------|----------------------------------|
| Type:                  | Single Cable Cleat               |
| Third party certified: | IEC 61914:2015                   |
| Lateral Load test:     | Average 25 kg                    |
| Axial Load test:       | Pass according to IEC 61914:2015 |
| Impact resistance:     | Very Heavy                       |
| Temperature range:     | -40°C to +105°C                  |
| Needle flame test:     | 650°C for 30 seconds             |

### Standards and Certifications

|              |                |                  |
|--------------|----------------|------------------|
| Conformance: | Standard:      | Certificate:     |
| Marine DNV-G | IEC 61914:2015 | DNV-GL TAE0004C3 |

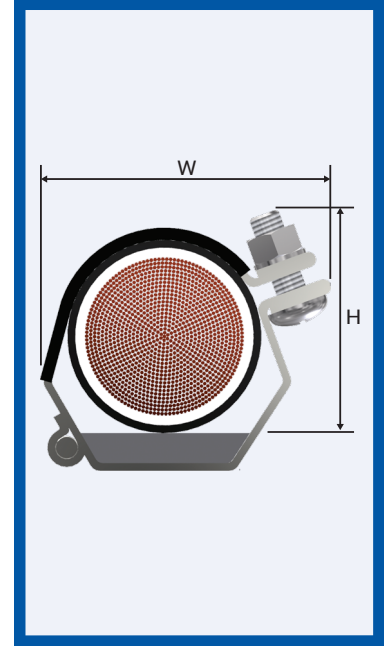

| Product Code | Cable Range  |              | Dimensions |          |
|--------------|--------------|--------------|------------|----------|
|              | Min. Dia. mm | Max. Dia. mm | Height mm  | Width mm |
| CC-S2832     | 28.0         | 32.0         | 60.0       | 57.0     |
| CC-S3034     | 30.0         | 34.0         | 61.0       | 59.0     |
| CC-S3236     | 32.0         | 36.0         | 63.0       | 61.0     |
| CC-S3438     | 34.0         | 38.0         | 65.0       | 63.0     |
| CC-S3640     | 36.0         | 40.0         | 67.0       | 64.0     |
| CC-S3842     | 38.0         | 42.0         | 69.0       | 65.0     |
| CC-S4044     | 40.0         | 44.0         | 70.0       | 68.0     |
| CC-S4246     | 42.0         | 46.0         | 71.0       | 69.0     |
| CC-S4448     | 44.0         | 48.0         | 73.0       | 72.0     |
| CC-S4650     | 46.0         | 50.0         | 74.0       | 73.0     |
| CC-S4852     | 48.0         | 52.0         | 75.0       | 77.0     |
| CC-S5054     | 50.0         | 54.0         | 78.0       | 78.0     |
| CC-S5256     | 52.0         | 56.0         | 79.0       | 80.0     |
| CC-S5458     | 54.0         | 58.0         | 80.0       | 82.0     |
| CC-S5660     | 56.0         | 60.0         | 81.0       | 85.0     |
| CC-S5862     | 58.0         | 62.0         | 82.0       | 87.0     |
| CC-S6064     | 60.0         | 64.0         | 85.0       | 88.0     |
| CC-S6266     | 62.0         | 66.0         | 87.0       | 90.0     |
| CC-S6468     | 64.0         | 68.0         | 89.0       | 91.0     |
| CC-S6670     | 66.0         | 70.0         | 90.0       | 92.0     |
| CC-S6872     | 68.0         | 72.0         | 92.0       | 94.0     |
| CC-S7074     | 70.0         | 74.0         | 95.0       | 97.0     |
| CC-S7276     | 72.0         | 76.0         | 97.0       | 99.0     |
| CC-S7478     | 74.0         | 78.0         | 98.0       | 102.0    |
| CC-S7680     | 76.0         | 80.0         | 100.0      | 104.0    |
| CC-S7882     | 78.0         | 82.0         | 102.0      | 106.0    |
| CC-S8084     | 80.0         | 84.0         | 105.0      | 107.0    |
| CC-S8286     | 82.0         | 86.0         | 107.0      | 110.0    |
| CC-S8488     | 84.0         | 88.0         | 109.0      | 111.0    |
| CC-S8690     | 86.0         | 90.0         | 110.0      | 113.0    |
| CC-S9094     | 90.0         | 94.0         | 115.0      | 121.0    |
| CC-S94118    | 94.0         | 118.0        | 133.0      | 139.0    |
| CC-S118130   | 118.0        | 130.0        | 140.0      | 144.0    |
| CC-S127150   | 127.0        | 150.0        | 161.0      | 166.0    |

CCG reserves the right to make alterations to the technical data, dimensions, designs and products available without notice. The illustrations cannot be considered binding. Please contact CCG for assistance.