



A2F-FHC

Ex db IIC, Ex eb IIC, Ex ta IIIC, Ex nR IIC

COMPRESSION GLAND for Single or Multi-Core Unarmoured Cable Housed in Conduit

Features and Benefits

- For indoors and outdoors, Group II, III, Zone 1, 2, 20, 21 and 22 hazardous areas.
- For use with all types of unarmoured cable housed in rigid or flexible conduit.
- Fitted with a rotating female conduit coupler.
- Factory-fitted with a specially formulated elastomeric seal for Built-in Safety™, acting on the sheath of the cable.
- Precision manufactured from high-quality brass (Marine Grade Electroless Nickel Plated™) available in aluminium or stainless steel 316/316L on request.
- Supplied with a thread-sealing gasket (parallel threads only).



Technical Data

Type:	A2F-FHC
Gland Material:	Brass (Marine Grade Electroless Nickel Plated™), Aluminium, Stainless Steel 316/316L
Seal Material:	Standard Thermoset Elastomer or Extreme Temperature Seals
Sealing Gasket Material:	HDPE, Nylon 66 or PTFE
Cable Type:	Single or Multi-Core Unarmoured Housed in Conduit
Sealing Area:	Cable Sheath
Optional Accessories:	Adaptor, Reducer, Earth Tag, Locknut and Serrated Washer
Note:	The installer should ensure that the materials are suitable for the installation environment

Standards and Certifications

Equipment Protection Levels:	IECEX/INMETRO: Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da ATEX/UKEX: Ex II 2/3G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da, Ex nR IIC Gc	
Continuous Operating Temp:	Standard Seals: -60°C to +95°C /100°C (HDPE/ Nylon Sealing Gasket) Extreme Temp. Seals: -60°C to +160°C (PTFE Sealing Gasket)	
Conformance:	Standard:	Certificate:
IEC/BS EN	IEC/BS EN 62444	CML 14CA364
IECEX	EN 60079 Part 0, 1, 7, 31	IECEX CML 20.0011
ATEX	EN 60079 Part 0, 1, 7, 31	CML 20ATEX1026
	EN 60079 Part 0, 15	CML 22ATEX4116
UKEX	BS EN 60079 Part 0, 1, 7, 31	CML 21UKEX1013
	BS EN 60079 Part 0, 15	CML 22UKEX4117
INMETRO (Brazil)	ABNT NBR IEC 60079 Part 0, 1, 7, 15, 31	TÜV 24.0267
SANS	SANS/IEC 60079 Part 0, 1, 7, 15, 31	MASC S/20-9022
IP66/68 100m - Parallel	IEC 60529	CML 15Y728
IP65/66 - Tapered	IEC 60529	
IP68 - Tapered and approved grease	IEC 60529	IECEX CML 20.0011
Deluge Protection	DTS-01	CML 14CA370-2
Corrosion Protection	ASTM B117-11, BS EN ISO 3231	EXOVA N968667
Marine ABS	IEC 60079 Part 0, 1, 7, 15, 31, IEC 60529	25-0164964-PDA
DNV	IEC 60079 Part 0, 1, 7, 15, 31, IEC 60529	TAE0000010
EMC Compatible	EN 55011, + A1, EN 55022	SGS EMC305079/1



Conditions for Safe Use - X

- None.
- Note: According to IEC 60079-14, 10.6.2: An Ex d gland will only maintain Ex d integrity when used with substantially round, compact and filled cable. If not a CCG VORTEX® barrier gland should be used.

Product Code	Gland Size Reference	Metric Entry Thread		NPT Entry Thread		Cable Detail		Max Length 'E'	Female Conduit Thread				Hexagonal Detail		Install. Torque Value Nm
		'C'	Min 'D'	'C'	Min 'D'	Min 'B'	Max 'B'		Metric 'G' (6g)	Metric 'H' (mm)	NPT 'G'	NPT 'H' (mm)	Max 'Flats'	Max 'Crns'	
044100-16S	00-16S	M16x1.5	12	-	-	1.0	4.0	52.0	M16-M25x1.5	12	1/2 3/4	15	24.0	27.0	32.5
044100	00-20ss	M20x1.5	12	1/2 3/4	15	3.0	8.5	52.0	M16-M25x1.5	12	1/2 3/4	15	24.0	27.0	32.5
0441-0	0-20s	M20x1.5	12	1/2 3/4	15	7.0	12.0	50.0	M16-M25x1.5	12	1/2 3/4	15	24.0	27.0	32.5
044101	1-20	M20x1.5	12	1/2 3/4	15	11.0	15.0	52.0	M16-M25x1.5	12	1/2 3/4	15	27.0	30.0	32.5
044122	2s-25s	M25x1.5	12	3/4 1	15/19	11.5	17.5	51.0	M25x1.5	12	3/4 1	15/19	35.0	39.0	47.5
044102	2-25	M25x1.5	12	3/4 1	15/19	15.0	20.0	51.0	M25x1.5	12	3/4 1	15/19	35.0	39.0	47.5
044133	3s-32s	M32x1.5	12	1 1/4	19	16.0	22.0	57.0	M32x1.5	12	1 1/4	19	42.0	47.0	55.0
044103	3-32	M32x1.5	12	1 1/4	19	20.0	26.5	57.0	M32x1.5	12	1 1/4	19	42.0	47.0	55.0
044144	4s-40s	M40x1.5	12	1 1/4 1 1/2	19/21	22.0	31.5	65.0	M40x1.5	12	1 1/4 1 1/2	19/21	52.0	59.0	65.0
044104	4-40	M40x1.5	12	1 1/4 1 1/2	19/21	26.0	34.0	65.0	M40x1.5	12	1 1/4 1 1/2	19/21	52.0	59.0	65.0
044155	5s-50s	M50x1.5	12	1 1/2 2	21	29.0	38.0	73.0	M50x1.5	12	1 1/2 2	21	65.0	73.0	82.5
044105	5-50	M50x1.5	12	1 1/2 2	21	34.0	44.5	73.0	M50x1.5	12	1 1/2 2	21	65.0	73.0	82.5
044166	6s-63s	M63x1.5	12	2 2/2 1/2	21/30	38.0	50.0	85.0	M63x1.5	12	2 2/2 1/2	21/30	80.0	90.0	97.5
044106	6-63	M63x1.5	12	2 2/2 1/2	21/30	44.5	56.5	85.0	M63x1.5	12	2 2/2 1/2	21/30	80.0	90.0	97.5
044177	7s-75s	M75x1.5	12	2 2/3	30/32	50.0	62.0	86.0	M75x1.5	12	2 2/3	30/32	96.0	102.0	115.5
044107	7-75	M75x1.5	12	2 2/3	30/32	56.0	67.5	86.0	M75x1.5	12	2 2/3	30/32	96.0	102.0	115.5
044108	8-80	M80x2.0	16	3	32	59.0	69.0	98.0	M80x2.0	16	3	32	96.0	102.0	120.0
044199	9s-90s	M90x2.0	16	3 3/3 1/2	33	60.0	75.0	105.0	M90x2.0	16	3 3/3 1/2	33	111.0	125.0	120.0
044109	9-90	M90x2.0	16	3 3/3 1/2	33	73.0	81.5	105.0	M90x2.0	16	3 3/3 1/2	33	111.0	125.0	120.0
044110	10-100	M100x2.0	16	3 3/3 1/2 4	34	81.0	92.0	106.0	M100x2.0	16	3 4	34	125.0	141.0	120.0

All dimensions except NPT are in mm. Male Entry Thread 'C' and Female Entry Thread 'B' can be any combination of either NPT or Metric threads.

Intermediate thread sizes are available on request. NPT threads should be tightened 'wrench tight'.

CCG reserves the right to make alterations to the technical data, dimensions, designs and products available without notice. The illustrations cannot be considered binding. Please contact CCG for assistance. A2F_FHC-GH210126E

PATENTED

A2F-FHC COMPRESSION GLAND

ENCLOSURES AND EQUIPMENT TO WHICH CABLE GLANDS ARE FITTED:-

- Must be made from materials which are compatible with the cable gland materials.
- Have a sealing area around the cable gland entry point with a surface roughness $< Ra\ 6.3\ \mu m$.
- Have entries that are perpendicular to the enclosure face in the area where the cable gland will seal to within 2.5° .
- Are sealed using the supplied sealing gasket (parallel threads) or by fully tightening into a threaded entry (tapered threads). Note that for tapered threads the IP rating can be improved to IP68 with the use of a suitable thread sealant.

MUST HAVE THREADED ENTRIES


- The same thread size as the cable gland. (Thread adapters should be used to correct

any mismatch).


- With a thread tolerance of metric class '6H' or equivalent.
- Where the thread length is a minimum of 10mm for Ex d applications or 3mm for all other applications

OR CLEARANCE HOLES (not Ex d)

- Where the hole size is the thread nominal size with a tolerance of $+0.1$ to $+0.7mm$. (e.g. the clearance hole for an M20 thread will have a diameter between 20.1mm and 20.7mm).
- Through material that is between 1mm and 12mm thick. (Thicker materials can be accommodated using glands with extended entry threads.)

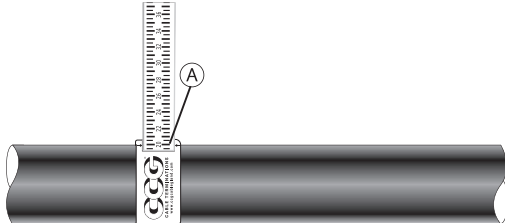


1. For accurate sizing, use a CCG Dimension Tape (A) on the outer cable sheath.

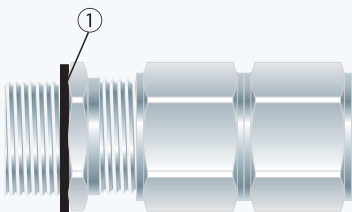


2. To maintain IP66/68, ensure the gasket (1) is in place.

If the gland has NPT entry threads fitted to a threaded entry then IP68 (2m) can be achieved by applying one of the following tested and approved grease types to the thread:- Renolit Lubrene CA700 or LX220 EP2, Renolit LC-WP2 or Moly LX2, or Dow Corning 4 Electrical Compound.


Alternative installation through an unthreaded entry.

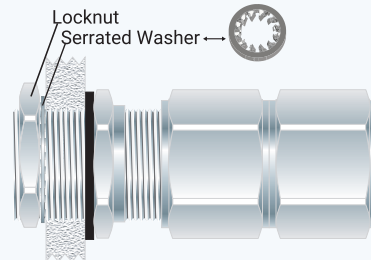


If the apparatus is untapped use a locknut.

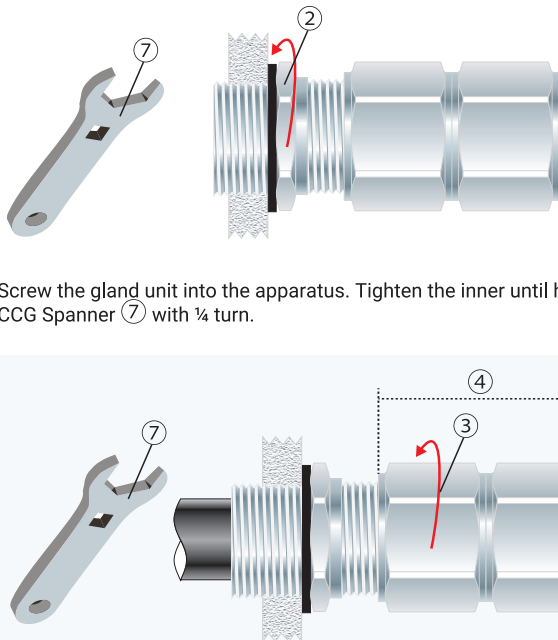

3. Screw the gland unit into the apparatus. Tighten the inner until hand tight (2) using a CCG Spanner (7) with $\frac{1}{4}$ turn.

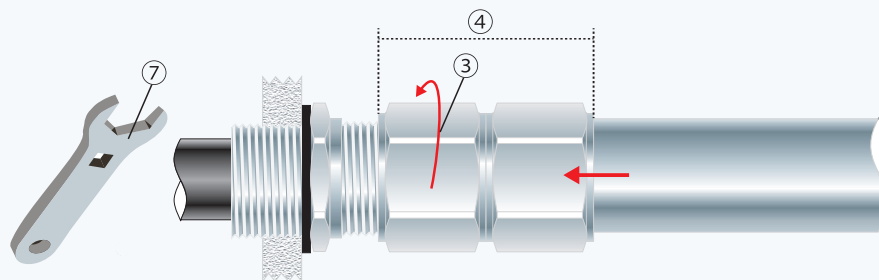

4. Pass the cable end through the conduit assembly (4) and the gland assembly. Tighten the outer (3) to the installation torque using a CCG Spanner (7) to produce a seal and grip on the cable.

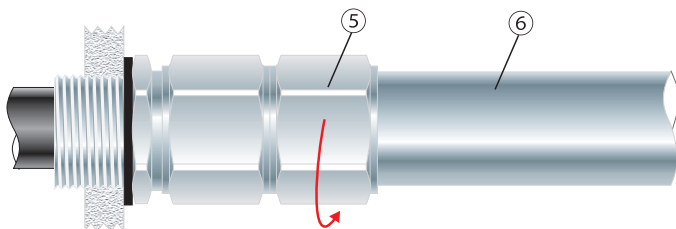

5. Fit the threaded conduit end (6) into the female rotating threads (5) as indicated.