



CX/Z

CAPTIVE COMPONENT GLAND®

for Braided and Steel Tape Cable

Features and Benefits

- For indoor and outdoor use.
- Two piece handling, no loose parts.
- Freely rotating captive cone and inspectible cone ring, providing an armour clamp and earth bond without twisting the armouring.
- Patented disconnect armoured clamp system for ease of inspection.
- Provides a seal on the outer sheath of the cable sealing to IP65/66.
- Precision manufactured from high-quality brass (nickel-plated) available in aluminium or stainless steel 316/316L on request.
- Complete with thread sealing gasket and heavy-duty locknut.




Technical Data

Type:	CX/Z
Gland Material:	Brass (Nickel Plated) BS 2874, EN 12164, Aluminium ASTM BS221, Stainless Steel 316/316L
Seal Material:	Thermoset Elastomer
Cable Type:	Braid, Steel Tape Armour
Armour Clamping:	Rotating Captive Cone and Inspectible Cone Ring
Sealing Area:	Outer Sheath
Optional Accessories:	Adaptor, Reducer, Earth Tag, Locknut, Serrated Washer and Shroud

Standards and Certifications

Mechanical Properties:	Impact Category 8 Anchorage Type C
Electrical Properties:	Category A
Continuous Operating Temp:	-65°C to +120°C
Conformance:	Standard: Certificate:
Design Standards	BS 6121:Part 1 CML 14CA364 IEC/BS EN 62444 CML 14CA364 SANS 62444 MASC 22-9012 SANS 1213 MASC 26-9013, SANS 2109/4596 IEC 60529 MASC 22-9015
IP66 - Parallel	IEC 60529
IP65 - Tapered	IEC 60529
Marine ABS	IEC 60529, IEC 62444 25-0167207-PDA
DNV	IEC 60529, BS 6121, IEC 62444 TAE000000Z
EMC Compatible	EN 55011, + A1, EN 55022 SGS EMC305079/1
London Underground Approval	BS EN 62444 LU 3043

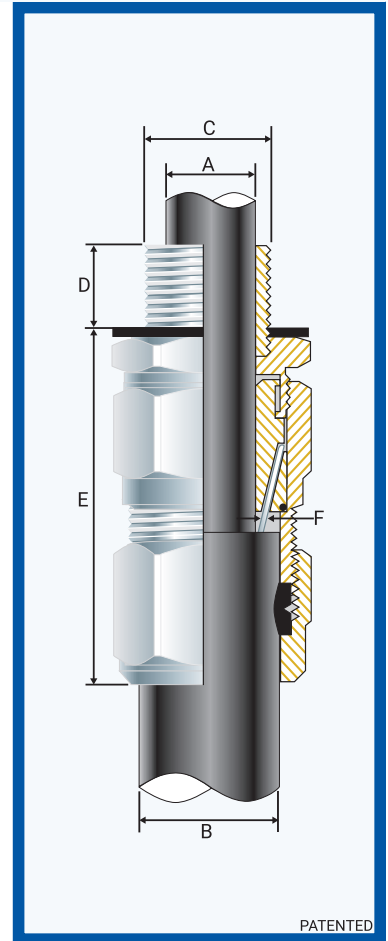

PATENTED



Installation Standards

- AS/NZS 3000
- BS 7430
- BS 6121-5
- IEC 60364-5-54
- BS 7671
- SANS 0142

Product Code	Gland Size Reference	Metric Entry Thread		NPT Entry Thread		Cable Detail			Maximum Length 'E'	Braid/STA Thickness		Hexagonal Detail		Installation Torque Value Nm
		'C'	Min 'D'	'C'	Min 'D'	Max 'A'	Min 'B'	Max 'B'		Min 'F'	Max 'F'	Max 'Flats'	Max 'Crns'	
051300-16	00-16ss	M16x1.5	10	-	-	8.5	8.0	13.5	55.0	0.2	0.85	♦ 24.0	♦ 27.0	35.0
051300	00-20ss	M20x1.5	10	1/2/3/4	15	8.5	8.0	13.5	55.0	0.2	0.85	♦ 24.0	♦ 27.0	35.0
0513-0	0-20s	M20x1.5	10	1/2/3/4	15	12.0	11.5	16.0	55.0	0.2	0.90	♦ 24.0	♦ 27.0	35.0
051301	1-20	M20x1.5	10	1/2/3/4	15	15.0	14.5	20.5	55.0	0.2	1.25	27.0	30.0	35.0
051322	2s-25s	M25x1.5	10	3/4/1	15/19	20.0	16.0	24.5	60.0	0.2	1.25	35.0	39.0	50.0
051302	2-25	M25x1.5	10	3/4/1	15/19	20.0	20.5	26.5	60.0	0.2	1.25	35.0	39.0	50.0
051333	3s-32s	M32x1.5	10	1/1 1/4	19	26.5	23.0	30.5	65.0	0.2	1.40	42.0	47.0	70.0
051303	3-32	M32x1.5	10	1/1 1/4	19	26.5	26.5	33.5	65.0	0.2	1.40	42.0	47.0	70.0
051344	4s-40s	M40x1.5	15	1 1/4/1 1/2	19/21	34.0	30.0	39.5	65.0	0.3	1.40	52.0	59.0	90.0
051304	4-40	M40x1.5	15	1 1/4/1 1/2	19/21	34.0	33.0	42.5	65.0	0.3	1.40	52.0	59.0	90.0
051355	5s-50s	M50x1.5	15	1 1/2/2	21	44.5	34.0	47.5	75.0	0.4	1.40	65.0	73.0	100.0
051305	5-50	M50x1.5	15	1 1/2/2	21	44.5	42.5	52.5	75.0	0.4	1.40	65.0	73.0	100.0
051366	6s-63s	M63x1.5	15	2/2 1/2	21/30	56.5	45.5	60.5	85.0	0.4	1.50	80.0	90.0	120.0
051306	6-63	M63x1.5	15	2/2 1/2	21/30	56.5	52.5	65.5	85.0	0.4	1.50	80.0	90.0	120.0
051377	7s-75s	M75x1.5	15	2 1/2/3	30/32	67.5	57.0	72.5	105.0	0.4	1.50	96.0	102.0	120.0
051307	7-75	M75x1.5	15	2 1/2/3	30/32	67.5	65.5	78.0	105.0	0.4	1.50	96.0	102.0	120.0
051308	8-80	M80x2.0	20	3	32	74.0	65.0	77.5	125.0	2.5	1.60	96.0	102.0	120.0
051399	9s-90s	M90x2.0	20	3/3 1/2	32/33	82.0	73.0	86.5	145.0	3.0	1.60	110.0	124.0	120.0
051309	9-90	M90x2.0	20	3/3 1/2	32/33	82.0	82.0	91.0	145.0	3.0	1.60	110.0	124.0	120.0


All dimensions except NPT are in mm.

* When manufactured in Aluminium, Hex will be 27 Across Flats and 30 Across Corners.


CCG reserves the right to make alterations to the technical data, dimensions, designs and products available without notice. The illustrations cannot be considered binding. Please contact CCG for assistance.

CXZ- IN010626E


CX/Z CAPTIVE COMPONENT GLAND®

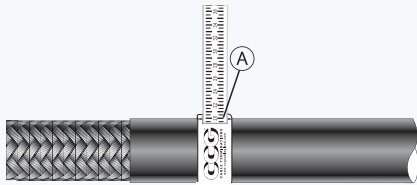

1. For accurate sizing, use a CCG Dimension Tape (A) on the outer cable sheath.

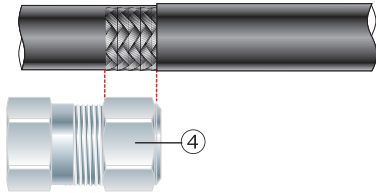


2. Cut back the cable outer sheath to expose the braid to a length not more than the outer nut (4).

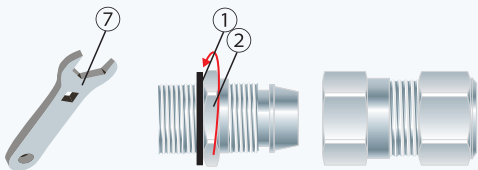


3. To maintain IP66 ensure the gasket (1) is in place. Screw the inner (2) into apparatus. Tighten the inner (2) to the installation torque using a CCG Spanner (7).


Alternative installation through an unthreaded entry.




If the apparatus is untapped use a locknut.

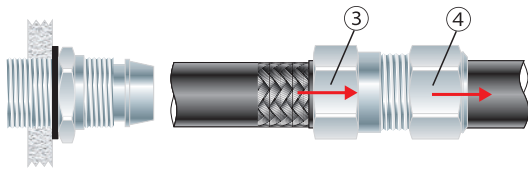


4. Pass the outer nut (4) and the body (3) over the cable.

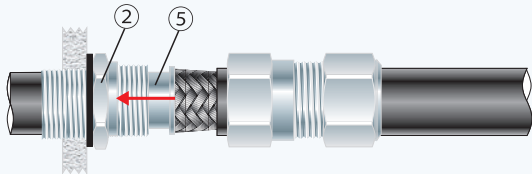


5. Pass cable end through the inner (2). Splay the braid over the cone (5).

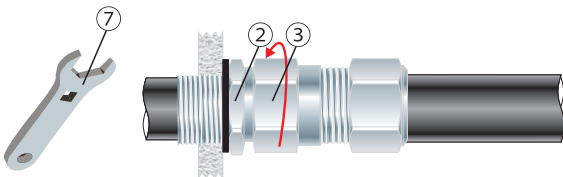

6. Tighten the body (3) onto the inner (2) until hand tight, then tighten with a CCG Spanner (7) with $\frac{3}{4}$ turn to lock the braid between the cone (5) and the cone ring (6).

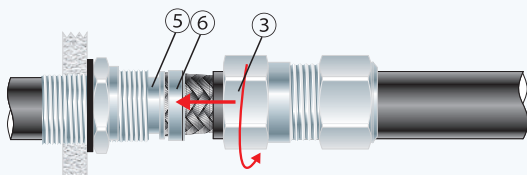

7. Unscrew the body (3). Check that the braid has locked between the cone (5) and the cone ring (6). (O-Rings on the cone (5) and cone ring (6) are sacrificial).

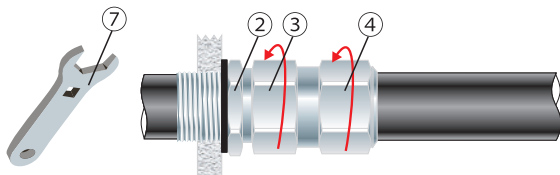

8. Tighten the body (3) into the inner (2) and tighten the body (3) to installation torque using a CCG Spanner (7). Tighten the outer nut (4) to produce a moisture proof seal by turning until the seal makes contact with the outer sheath of cable and then make one full turn.