

A2EX

DOUBLE SEAL COMPRESSION GLAND for Unarmoured Tray Cable

Features and Benefits

- Gland for use in Ordinary and Hazardous Locations.
- Inner seal seals on the cable sheath.
- Harder outer seal grips the cable giving superior cable retention and IP rating.
- Precision manufactured from high-quality brass (Marine Grade Electroless Nickel Plated™) available in stainless steel 316/316L on request.
- Supplied with a thread-sealing gasket.



Technical Data

Type:	A2EX
Gland Material:	Brass (Marine Grade Electroless Nickel Plated™), Stainless Steel 316/316L
Seal Material:	Standard Thermoset Elastomer or Extreme Temperature Seals
Sealing Gasket Material:	HDPE, Nylon 66 or PTFE
Cable Type:	Unarmoured Tray Cable
Sealing Area:	Outer Sheath
Optional Accessories:	Adaptor, Reducer, Earth Tag, Locknut, Serrated Washer and Shroud
Note:	The installer should ensure that the materials are suitable for the installation environment.


Temperature Range

When fitted with sealing gaskets the temperature range for the gland will be:-

Sealing Gasket Material:	Standard Seals: -60°C and +95°C/100°C (HDPE/Nylon Sealing Gasket)
	Extreme Temp. Seals: -60°C and +160°C (PTFE Sealing Gasket)

Standards and Certifications

Equipment Protection Levels:	NEC / CEC: Class I Div 2 Gr ABCD, Class II Division 2 Gr FG, Class III Division 2 Ex db IIC Gb, Class I Zone 1 AEx eb IIC Gb / Ex eb IIC Gb Zone 20 AEx ta IIIC Da Ex ta IIIC Da, Class I Zone 2 AEx nR IIC Gc / Ex nR IIC Gc, IP66/67/68, IP65, Type 4 IECEx: Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da, Ex nR IIC Gc	
Conformance:	Standard:	Certificate:
CEC	CSA C22.2 No. 18.3-12, 174:2018 & 213:2017	E115595
	CSA C22.2 No. 60079 - 0, 1, 7, 15, 31	
NEC	UL514B, UL121201 UL 60079: 0, 7, 15, 31	
IECEX	IEC 60079 Part 0, 1, 7, 15, 31	IECEX CML 20.0011
IP66/68 100m - Parallel	IEC 60529	CML 15Y728
IP68 - Tapered and approved grease	IEC 60529	IECEX CML 20.0011
Nema Type 4X	NEMA 250	E115595
Deluge Protection	DTS-01	CML 14CA370-2
Corrosion Protection	ASTM B117-11, BS EN ISO 3231	EXOVA N968667
Marine ABS	IEC 60079 - 0, 1, 7, 15, 31 and IEC 60529	25-0164964-PDA
DNV	IEC/EN 60079 - 0, 1, 7, 15, 31	TAE0000010

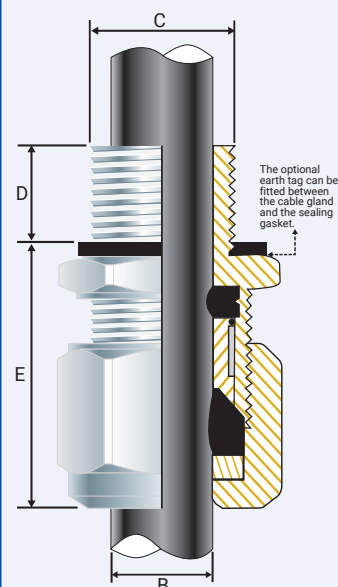

PATENTED



Installation Requirements / Specific Conditions of Use

- The cable glands, sizes M20, ¾" NPT and smaller, shall only be used on fixed installations where the cable is clamped, or stress applied to the cable in the gland is prevented. (NEC/CEC only)
- The cable glands, when supplied with suffix 'FC', shall only be used with an approved UL 514B conduit fitting. (NEC/CEC only)
- The cable glands shall only be used if the temperature, at the point of entry, is as specified above.

NPT Entry Thread

Gland Size Ref	Product Code	NPT Entry Thread		Alternative Thread Product Code	NPT Entry Thread		Cable Detail		Maximum Length 'E'	Hexagonal Detail	
		'C'	Min 'D'		'C'	Min 'D'	Min 'B'	Max 'B'		Max 'Flats'	Max 'Crms'
00-20ss	053600-012NPT-MNA	½	0.590	053600-034NPT-MNA	¾	0.590	0.118	0.335	0.984	0.945	1.063
0-20s	0536-0-012NPT-MNA	½	0.590	0536-0-034NPT-MNA	¾	0.590	0.275	0.472	0.984	0.945	1.063
1-20	053601-012NPT-MNA	½	0.590	053601-034NPT-MNA	¾	0.590	0.433	0.590	1.181	1.063	1.181
2s-25s	053622-034NPT-MNA	¾	0.590	053622-001NPT-MNA	1	0.748	0.453	0.689	1.181	1.377	1.535
2-25	053602-034NPT-MNA	¾	0.590	053602-001NPT-MNA	1	0.748	0.590	0.787	1.181	1.377	1.535
3s-32s	053633-001NPT-MNA	1	0.748	053633-114NPT-MNA	1½	0.748	0.630	0.866	1.181	1.653	1.850
3-32	053603-001NPT-MNA	1	0.748	053603-114NPT-MNA	1½	0.748	0.787	1.043	1.181	1.653	1.850
4s-40s	053644-114NPT-MNA	1½	0.748	053644-112NPT-MNA	1½	0.826	0.866	1.240	1.495	2.046	2.322
4-40	053604-114NPT-MNA	1½	0.748	053604-112NPT-MNA	1½	0.826	1.023	1.338	1.495	2.046	2.322
5s-50s	053655-112NPT-MNA	1½	0.826	053655-002NPT-MNA	2	0.826	1.141	1.495	1.810	2.558	2.873
5-50	053605-112NPT-MNA	1½"	0.826	053605-002NPT-MNA	2	0.826	1.338	1.751	1.810	2.558	2.873
6s-63s	053666-002NPT-MNA	2	0.826	053666-212NPT-MNA	2½	1.181	1.495	1.968	2.046	3.148	3.542
6-63	053606-002NPT-MNA	2	0.826	053606-212NPT-MNA	2½	1.181	1.751	2.224	2.046	3.148	3.542
7s-75s	053677-212NPT-MNA	2½	1.181	053677-003NPT-MNA	3	1.259	1.968	2.440	2.125	3.778	4.250
7-75	053607-212NPT-MNA	2½	1.181	053607-003NPT-MNA	3	1.259	2.204	2.656	2.125	3.778	4.250
8-80	053608-003NPT-MNA	3	1.259	-	-	-	2.125	2.715	2.676	3.778	4.250
9s-90s	053699-003NPT-MNA	3	1.259	053699-312NPT-MNA	3½	1.299	2.361	2.952	2.755	4.368	4.919
9-90	053609-003NPT-MNA	3	1.259	053609-312NPT-MNA	3½	1.299	2.873	3.207	2.755	4.368	4.919
10-100	053610-312NPT-MNA	3½	1.299	053610-004NPT-MNA	4	1.338	3.188	3.621	2.755	4.919	5.549
11-110	053611-004NPT-MNA	4	1.338	-	-	-	3.581	3.975	2.755	5.313	5.982

All dimensions are in inches. NPT threads should be tightened 'wrench tight'.

CCG reserves the right to make alterations to the technical data, dimensions, designs and products available without notice. The illustrations cannot be considered binding. Please contact CCG for assistance.

A2EX-GH150425NA

FITTING INSTRUCTIONS

Metric Entry Thread

Gland Size Reference	Product Code	Metric Entry Thread		Cable Detail		Maximum Length 'E'	Hexagonal Detail		Tightening Torque Nm/lb ft
		'C'	Min 'D'	Min 'B'	Max 'B'		Max 'Flats'	Max 'Crns'	
00-20ss	053600-MNA	M20x1.5	0.591	0.118	0.335	0.984	0.945	1.063	33/24
0-20s	05360-MNA	M20x1.5	0.591	0.276	0.472	0.984	0.945	1.063	33/24
1-20	053601-MNA	M20x1.5	0.591	0.433	0.591	1.181	1.063	1.181	33/24
2s-25s	053622-MNA	M25x1.5	0.591	0.453	0.689	1.181	1.378	1.535	48/35
2-25	053602-MNA	M25x1.5	0.591	0.591	0.787	1.181	1.378	1.535	48/35
3s-32s	053633-MNA	M32x1.5	0.591	0.630	0.866	1.181	1.654	1.850	55/41
3-32	053603-MNA	M32x1.5	0.591	0.787	1.043	1.181	1.654	1.850	55/41
4s-40s	053644-MNA	M40x1.5	0.591	0.866	1.240	1.496	2.047	2.323	65/48
4-40	053604-MNA	M40x1.5	0.591	1.024	1.339	1.496	2.047	2.323	65/48
5s-50s	053655-MNA	M50x1.5	0.591	1.142	1.496	1.811	2.559	2.874	83/61
5-50	053605-MNA	M50x1.5	0.591	1.339	1.752	1.811	2.559	2.874	83/61
6s-63s	053666-MNA	M63x1.5	0.591	1.496	1.969	2.047	3.150	3.543	98/72
6-63	053606-MNA	M63x1.5	0.591	1.752	2.224	2.047	3.150	3.543	98/72
7s-75s	053677-MNA	M75x1.5	0.591	1.969	2.441	2.126	3.780	4.252	116/85
7-75	053607-MNA	M75x1.5	0.591	2.205	2.657	2.126	3.780	4.252	116/85
8-80	053608-MNA	M80x2.0	0.787	2.126	2.717	2.677	3.780	4.252	120/89
9s-90s	053699-MNA	M90x2.0	0.787	2.362	2.953	2.756	4.370	4.921	120/89
9-90	053609-MNA	M90x2.0	0.787	2.874	3.209	2.756	4.370	4.921	120/89
10-100	053610-MNA	M100x2.0	0.787	3.189	3.622	2.756	4.921	5.551	120/89
11-110	053611-MNA	M110x2.0	0.787	3.583	3.976	2.756	5.315	5.984	175/129
12-120	053612-MNA	M120x2.0	0.787	3.976	4.291	2.756	5.512	6.220	175/129
13-130	053613-MNA	M130x2.0	0.787	4.291	4.567	2.756	5.748	6.457	175/129

Dimensions are in inches.

FITTING INSTRUCTION

ENCLOSURES AND EQUIPMENT TO WHICH CABLE GLANDS ARE FITTED:-


- Must be made from materials which are compatible with the cable gland materials.
- Have a sealing area around the cable gland entry point with a surface roughness < Ra 6.3 µm.
- Have entries that are perpendicular to the enclosure face in the area where the cable gland will seal to within 2.5°.
- Are sealed using the supplied sealing gasket (parallel threads) or by fully tightening into a threaded entry (tapered threads). Note that for tapered threads the IP rating can be improved to IP68 with the use of a suitable thread sealant.

MUST HAVE THREADED ENTRIES


- The same thread size as the cable gland. (Thread adapters should be used to correct

any mismatch).

- With a thread tolerance of metric class '6H' or equivalent.
 - Where the thread length is a minimum of 10mm for Ex d applications or 3mm for all other applications
- OR CLEARANCE HOLES** (not Ex d)
- Where the hole size is the thread nominal size with a tolerance of +0.1 to +0.7mm. (e.g. the clearance hole for an M20 thread will have a diameter between 20.1mm and 20.7mm).
 - Through material that is between 1mm and 12mm thick. (Thicker materials can be accommodated using glands with extended entry threads.)




1. For accurate sizing, use a CCG Dimension Tape (A) on the outer cable sheath.




2. To maintain IP66/68, ensure the gasket (1) is in place.

If the gland has NPT entry threads fitted to a threaded entry then IP68 (2m) can be achieved by applying one of the following tested and approved grease types to the thread:- Renolit Lubrene CA700 or LX220 EP2, Renolit LC-WP2 or Moly LX2, or Dow Corning 4 Electrical Compound.




3. Screw the gland unit into the apparatus. Tighten the inner (2) to the installation torque using a CCG Spanner (4).


Alternative installation through an unthreaded entry.



If the apparatus is untapped use a locknut.



4. Pass the cable end through the gland assembly.

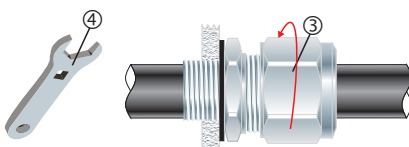

5. Tighten the outer nut (3) to the installation torque using a CCG Spanner (4) to produce a seal and grip on the cable.